


DIAL TEST INDICATORS

**INSPECTION
CERTIFICATE**
TRACEABLE TO NIST

JEWELLED
BEARING

- Meet DIN2270 (except 2380-02, 2381-02)
- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: diameter $\varnothing 4$ mm and $\varnothing 8$ mm
- Optional accessory: styli (page 170)




2380-08

(mm)

Code	Range	Graduation	Accuracy	Hysteresis	Dial reading	A	L
2380-08*	0.8mm	0.01mm	13 μ m	3 μ m	0-40-0	$\varnothing 30$	13.5
2381-08*	0.8mm	0.01mm	13 μ m	3 μ m	0-40-0	$\varnothing 37$	13.5
2380-02*	0.2mm	0.002mm	6 μ m	2 μ m	0-100-0	$\varnothing 30$	12.5
2381-02*	0.2mm	0.002mm	6 μ m	2 μ m	0-100-0	$\varnothing 37$	12.5


*Supplied with manufacturer inspection certificate traceable to NIST USA

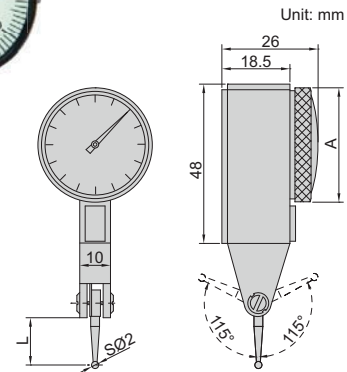

**INSPECTION
CERTIFICATE**
TRACEABLE TO NIST

JEWELLED
BEARING

- Jeweled bearing
- Carbide contact point
- Two measuring directions
- Anti magnetic body
- Supplied with two clamps: 5/32" DIA and 3/8" DIA



2380-31

INCH DIAL TEST INDICATORS

Code	Range	Graduation	Accuracy	Dial reading	A	L
2380-31*	0.03"	0.001"	± 0.001 "	0-15-0	1.181" DIA	0.50"
2380-35*	0.03"	0.0005"	± 0.0005 "	0-15-0	1.181" DIA	0.50"
2380-301*	0.008"	0.0001"	± 0.0001 "	0-40-0	1.181" DIA	0.563"
2381-31*	0.03"	0.001"	± 0.001 "	0-15-0	1.457" DIA	0.50"
2381-35*	0.03"	0.0005"	± 0.0005 "	0-15-0	1.457" DIA	0.50"
2381-301*	0.008"	0.0001"	± 0.0001 "	0-40-0	1.457" DIA	0.563"

*Supplied with manufacturer inspection certificate traceable to NIST

